


**Lightweight and portable folding gantry cranes
movable, under load.
Also adjustable in height and width**

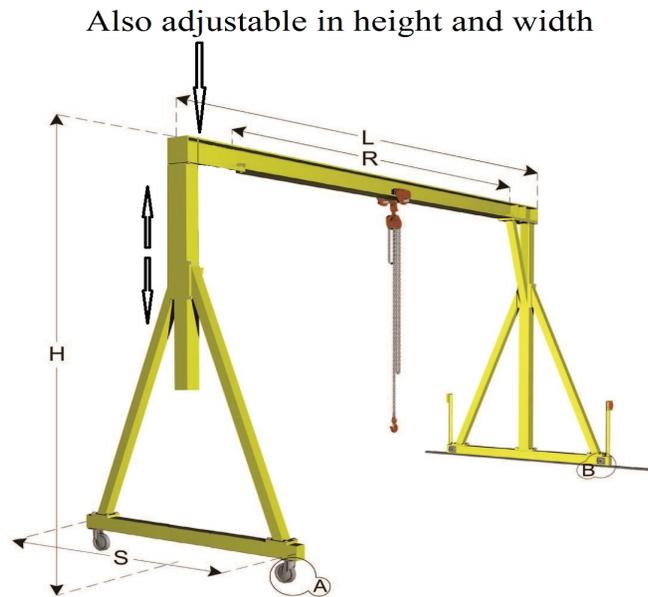

Description

This is a high quality as well as versatile gantry crane which is suited for in as well as outdoors. It can be easily as well as quickly erected as well the clearance width can be easily adjusted because of the lindapter connection. Models between load capacity range between 50 and 3000 kg and clearance widths between 2 and 6 m are available. D6 regulations must be observed while erecting this device. Polyamide (used for smooth industrial floors as well as for capacities between 50 and 3000 kg). Solid rubber (suitable for rough, uneven floors as well as for capacities up to 1000 kg) and Vulkollan (used on slightly uneven floors (with stones, holes, edges) and for capacities up to 3000 kg) are the types of rollers which are made available. The gantry crane without hoist, power feed and clamping buffers Painted in RAL 1004 (golden yellow) are delivered. It has CE mark and has declaration of conformity

MODEL	CAPACITY	H	S	C
	KG	(mm)	(mm)	(mm)
GP0500	500	3000	3000	500
GP0500	500	4000	4000	600
GP0500	500	5000	5000	550
GP1000	1000	3000	3000	500
GP1000	1000	4000	4000	550
GP1000	1000	5000	5000	600
GP2000	2000	3000	3000	500
GP2000	2000	4000	4000	550
GP2000	2000	5000	5000	600
GP3000	3000	3000	3000	500
GP3000	3000	4000	4000	550
GP3000	3000	5000	5000	600

GANTRY CRANES PORTABLE - IRON LIGHT

The Adjustable Height Gantry Crane combines lightweight and rigid, sturdy construction into one unit. The all "iron light" construction of this gantry crane makes it corrosion resistant and perfect for outdoor use. The lightweight I-Beam allows height adjustment without the need of a hoist or fork truck. All pinned connections makes it possible for single person set up and take down in just minutes.

We thank you for your kind request, we hereby send you our best quotation for the supply of the following items:

GANTRY CRANES PORTABLE - IRON LIGHT

- type GP2000
- Capacity Kg. 2000
- height maximum under beam m. 2.5
- height minimum under beam m. 1.8
- gauge / m width. 7
- Wheels including swiveling
- push including trolley
- Galvanization Including
- EC including -Declaration

Electrical system: excluded


Color: ZINC

Documentation supplied with the crane:

- Certificate of conformity 'EC
- Operating and maintenance

FEATURES

The bearing beam on which runs the hoist is made of a profile rolled IPE or HE depending on the flow and of The beam is fixed to the legs, with tubular stiffening cross, through high strength bolts and are provided for bracing normally internal or external to stiffen the structure.

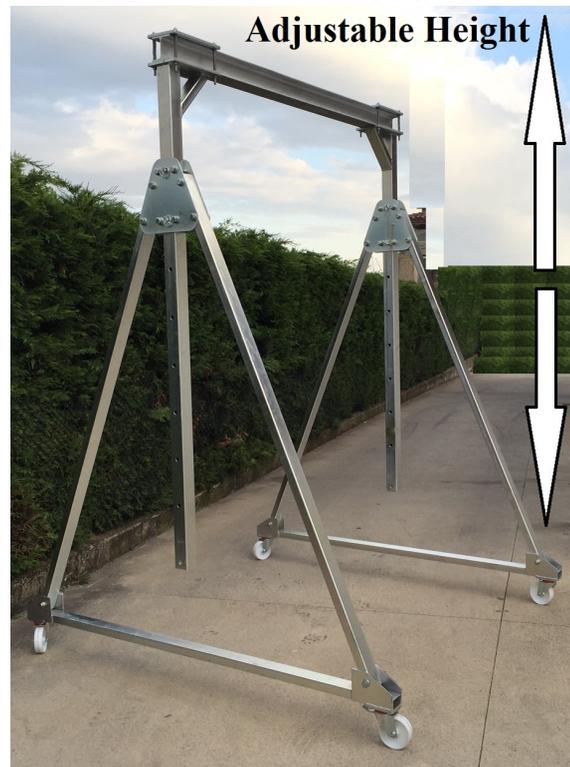

Gantry cranes are equipped with electro-industrial wheels swivel on double ball, with hub on a double ball and rolling band reported vulcolan to ensure maximum smoothness of industrial floor smooth; the wheels are equipped with integrated holding brake to bring the crane up to 2000 kg while for higher capacities are supplied 2 wheel chocks.

